



Art. A340 TIS4


## SARACINESCA IN ACCIAIO A VITE INTERNA PN40 CAST STEEL GATE VALVE NON RISING STEM PN40

### APPLICAZIONE:

Acqua calda e fredda, depurazione e irrigazione.

### APPLICATION:

Hot and cold water, treatment plant and irrigation systems.

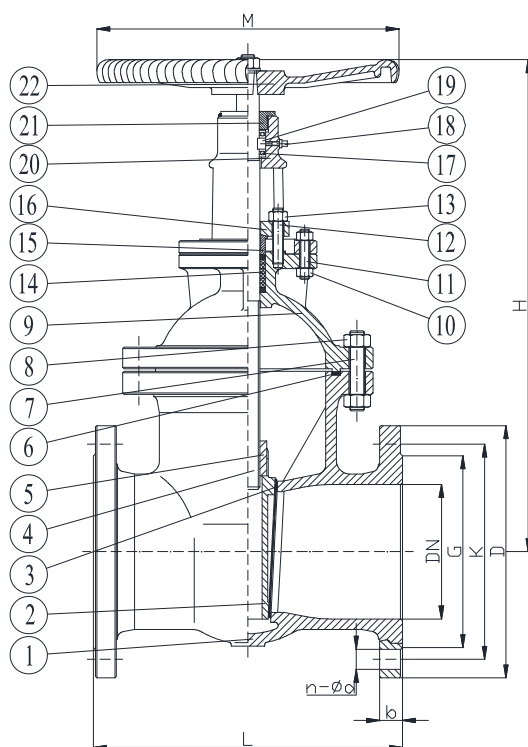

DN	G	K	D	L	H	M	n-ød	b	W (kg)
200	285	320	375	550	744	450	12-30	34	210
250	345	385	450	650	864	500	12-33	38	318.5
300	410	450	515	750	948	550	16-33	42	430
350	465	510	580	850	1012	600	16-36	46	520
400	535	585	660	950	1180	720	16-39	50	680

### RIVESTIMENTO - COATING

Rivestimento esterno in vernice epossidica di colore blu RAL 5015.  
External surface epoxy coated of blue colour RAL 5015.

### CARATTERISTICHE PRINCIPALI - MAIN FEATURES

<b>NORMA PROGETTO:</b>	EN 12516, EN 1984
<b>SCARTAMENTO:</b>	EN 558 Serie 26
<b>FLANGE:</b>	EN 1092-1
<b>COLLAUDI:</b>	EN 12266-1
<b>TEMPERATURA ESERCIZIO:</b>	Max. +50°C a 40 bar Rapp. pressione/temperatura conforme con EN 12516
<b>DESIGN STANDARD:</b>	EN 12516, EN 1984
<b>FACE TO FACE:</b>	EN 558 Serie 26
<b>FLANGES:</b>	EN 1092-1
<b>TESTS:</b>	EN 12266-1
<b>WORKING TEMPERATURE:</b>	Max. +50°C a 40 bar Rapp. pressione/temperatura conforme con EN 12516

	COMPONENTI - PARTS	MATERIALI - MATERIALS
1	CORPO BODY	DIN 17245 GS-C25 DIN 17245 GS-C25
2	CUNEO WEDGE	DIN 17245 GS-C25 DIN 17245 GS-C25
3	TENUTA SEAT	ACCIAIO INOX X10Cr13 SS X10Cr13
4	ASSE STEM	ASTM A182 F6a ASTM A182 F6a
5	MADREVITE STEM NUT	BRONZO ALLUMINIO ALUMINIUM BRONZE
6 / 14	GUARNIZIONE GASKET	ACC. INOX AISI 304+GRAFITE SS AISI 304+GRAPHITE
7 / 10 12	VITE BOLT	ASTM A193 B7 ASTM A193 B7
8 / 11 13	DADO NUT	ASTM A194 2H ASTM A194 2H
9	CAPPELLO BONNET	DIN 17245 GS-C25 DIN 17245 GS-C25
15	ANELLO GLAND	ASTM A182 F6a ASTM A182 F6a
16	PREMISTOPPA PACKING GLAND	DIN 17245 GS-C25 DIN 17245 GS-C25
17	CUSCINETTO BEARING	— —
18	TAPPO PLUG	OTTONE BRASS
19	ANELLO HOLDING RING	ASTM A276 ASTM A276
20	STAFFA YOKE	DIN 17245 GS-C25 DIN 17245 GS-C25
21	BOCCOLA PACKING	ASTM A1035 ASTM A1035
22	VOLANTINO HANDWHEEL	ASTM A536 ASTM A536