

Angle Seat Globe Valve, Metal


Construction

The GEMÜ 507 manually operated 2/2-way angle seat globe valve has an ergonomically designed plastic handwheel. The valve spindle is sealed by a self-adjusting gland packing providing low maintenance and reliable valve spindle sealing even after a long service life. The wiper ring fitted in front of the gland packing protects it against contamination and damage. A handwheel extension (not for bonnet size 0) is available as an option enabling full operator isolation.

Features

- Various valve body connections: threaded sockets, threaded spigots, butt weld spigots
- Standard floating plug on spindle ensures excellent seat sealing
- Good flow capability due to angle seat design
- Optionally suitable for contact with food according to Regulation (EC) No. 1935/2004 (K-No. 2013)
- Standard gland packing suitable for vacuum up to 20 mbar (abs.)

Sectional drawing

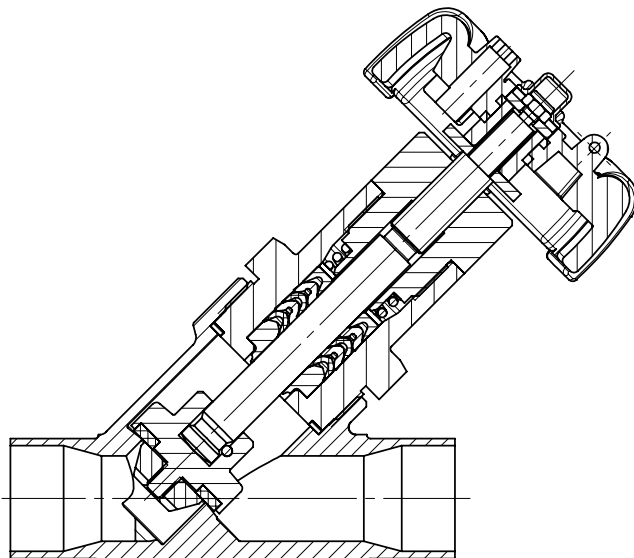

Technical data

Working medium

Corrosive, inert, gaseous and liquid media which have no negative impact on the physical and chemical properties of the body and seal material.

Max. perm. pressure of working medium see table

Media temperature -10 °C to 180 °C

Max. permissible viscosity 600 mm²/s (cSt)

Other versions for lower/higher temperatures and viscosities on request.

Ambient conditions

Max. ambient temperature 60 °C

Maximum permissible seat leakage rate / Open-Closed-Valve

Seat seal	Standard	Test procedure	Leakage rate	Test medium
PTFE	DIN EN 12266-1	P12	A	air

Maximum permissible seat leakage class / Control valve

Seat seal	Standard	Test procedure	Leakage rate	Test medium
PTFE	DIN EN 60534-4	1	VI	air
Metal	DIN EN 60534-4	1	IV	air

Bonnet weight [kg]

Bonnet size	DN 6	DN 8	DN 10	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80
0	0.3	0.3	0.3	0.3	-	-	-	-	-	-	-
1 / 1E	-	1.0	1.0	1.0	1.2	1.4	2.4	2.6	3.8	-	-
2 / 2E	-	-	-	-	-	-	-	-	-	6.8	8.4

Technical data

Max. operating pressure [bar]

Bonnet size	DN 6	DN 8	DN 10	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80
0	25	25	25	25	-	-	-	-	-	-	-
1 / 1E	-	25	25	25	25	25	25	25	25	-	-
2 / 2E	-	-	-	-	-	-	-	-	-	16	16

All pressures are gauge pressures.

Pressure / temperature correlation for angle seat globe valve bodies

Connection code	Material code	Max. allowable operating pressures in bar at temperature °C*					
		RT	100	150	200	250	300
1, 9, 17, 37, 60, 63, 3C, 3D	37	25.0	23.8	21.4	18.9	17.5	16.1
0, 16, 17, 18, 37, 59, 60, 65	34	25.0	24.5	22.4	20.3	18.2	16.1
13 (DN 15 - DN 50)	34	25.0	23.6	21.5	19.8	18.6	17.2
80, 88 (DN 15 - DN 40)	34	25.0	21.2	19.3**	-	-	-
80, 88 (DN 50 - DN 80)	34	16.0	16.0	16.0**	-	-	-
82 (DN 15 - DN 32)	34	25.0	21.2	19.3**	-	-	-
82 (DN 40 - DN 65)	34	16.0	16.0	16.0**	-	-	-
86 (DN 15 - DN 40)	34	25.0	21.2	19.3**	-	-	-
86 (DN 50 - DN 65)	34	16.0	16.0	16.0**	-	-	-
10 (DN 15 - DN 50)	37	25.0	25.0	22.7	21.0	19.8	18.5
47 (DN 15 - DN 50)	34	15.9	13.3	12.0	11.1	10.2	9.7
0, 16, 17, 18, 59, 60	40	25.0	20.6	18.7	17.1	15.8	14.8
17, 59, 60	C2	25.0	21.2	19.3	17.9	16.8	15.9

* The valves can be used down to -10°C
All pressures are gauge pressures.

** max. temperature 140 °C

RT = Room Temperature

Kv values [m³/h]

	DN 6	DN 8	DN 10	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80
Butt weld spigots, DIN 11850	1.6	1.8	2.4	2.4	-	-	-	-	-	-	-
Butt weld spigots, DIN 11866	-	2.2	4.5	5.5	11.7	20.5	33.0	51.0	61.0	110.0	117.0
Threaded sockets, DIN ISO 228	-	-	4.5	5.4	10.0	15.2	23.0	41.0	68.0	95.0	130.0

Kv values determined acc. to DIN EN 60534. The Kv values for other product configurations (e.g. other connections or body materials) may differ.

Order data

Body configuration	Code
2/2-way body	D
Angle body only in material code 37 (DN 15 - 50)	E

Connection	Code
Butt weld spigots	
Spigots DIN	0
Spigots EN 10357 series B	16
Spigots EN 10357 series A (formerly DIN 11850 series 2) / DIN 11866 series A	17
Spigots DIN 11850 series 3	18
Spigots SMS 3008	37
Spigots ASME BPE	59
Spigots ISO 1127 / EN 10357 series C / DIN 11866 series B	60
Spigots ANSI/ASME B36.19M Schedule 10s	63
Spigots ANSI/ASME B36.19M Schedule 40s	65

Threaded connections	
Threaded sockets DIN ISO 228	1
Threaded sockets BS 21 Rc length DIN 3202-4 series M8	3C
Threaded spigots DIN ISO 228	9
Threaded sockets NPT length DIN 3202-4 series M8	3D

Flanges	
Flanges EN 1092 / PN25 / form B length EN 558, series 1	10
Flanges EN 1092 / PN25 /form B length see body dimensions	13
Flanges ANSI Class 125/150 RF length see body dimensions	47

Clamp connections	
Clamps ASME BPE for pipe ASME BPE, length ASME BPE	80
Clamps DIN 32676 series B for pipe EN ISO 1127, length EN 558, series 1	82
Clamps DIN 32676 series A for pipe DIN 11850, length EN 558, series 1	86
Clamps ASME BPE for pipe ASME BPE, length EN 558, series 1	88

Valve body material	Code
1.4435 (ASTM A 351 CF3M \cong 316L), Investment cast.	34
1.4408, Investment casting	37
1.4435 (316 L), Forged body	40
1.4435, Investment casting Material equivalency 316 L	C2*

* A surface finish from the order code table "K number" must be specified for valve body material C2.

Seat seal	Code
PTFE	5
PTFE, glass fibre reinforced	5G
PEEK (for bonnet 0)	PK

Control function	Code
Manually operated	0
Manually operated with handwheel clamp	L

Bonnet size	Code
Handwheel diameter 32 mm	0
Handwheel diameter 90 mm	1
Handwheel diameter 90 mm Handwheel extension	1E
Handwheel diameter 140 mm	2
Handwheel diameter 140 mm Handwheel extension	2E

Version	Code
Gland packing PTFE / PTFE suitable for contact with food according to EU Regulation 1935/2004	2013
Media temperature -10 to 210 °C (only with seat seal Code 5G and 10)	2023
Surface finish for valve body material C2	
Ra \leq 0.6 μ m (25 μ inch) for process contact surfaces, in accordance with ASME BPE SF2 + SF3, mechanically polished internal	1903
Ra \leq 0.8 μ m (30 μ inch) for process contact surfaces, in accordance with DIN 11866 H3, mechanically polished internal	1904
Ra \leq 0.4 μ m (15 μ inch) for process contactsurfaces, in accordance with DIN 11866 H4, ASME BPE SF1, mechanically polished internal	1909
Ra \leq 0.6 μ m for process contact surfaces, in accordance with ASME BPE SF6, electropolished internal/external	1953
Ra \leq 0.8 μ m for process contact surfaces, in accordance with DIN 11866 HE3, electropolished internal/external	1954
Ra \leq 0.4 μ m for process contact surfaces, in accordance with DIN 11866 HE4/ASME BPE SF5, electropolished internal/external	1959

Order data

Special version	Code
Rigid plug fixing *, special version for oxygen	B
Rigid plug fixing *	C
Special version for oxygen	S
* Standard for bonnet size 0	

Order example	507	25	D	60	34	5	0	1	-	B
Type	507									
Nominal size		25								
Body configuration (code)			D							
Connection (code)				60						
Valve body material (code)					34					
Seat seal (code)						5				
Control function (code)							0			
Bonnet size (code)								1		
Version (Code)									-	
Special version (Code)										B

Version for food contact

For food contact, the product must be ordered with the following ordering options:

Version code 2013

Seat seal code 5, 5G


Valve body material code 34, 37, 40, C2

Dimensions [mm]

Installation dimensions - Valve with 2/2-way body

Bonnet	DN	SW1		øB	CT/LA (max. height)		
					Control function code 0	Control function code L	Bonnet code 1E, 2E*
0	6	24	hexagonal	32	82	89	-
0	8	24	hexagonal	32	82	89	-
0	10	24	hexagonal	32	82	89	-
0	15	24	hexagonal	32	82	89	-
1	8	41	hexagonal	90	140	149	168
1	10	41	hexagonal	90	140	149	168
1	15	41	hexagonal	90	143	152	171
1	20	46	hexagonal	90	150	159	179
1	25	46	hexagonal	90	158	167	186
1	32	41	double flat	90	167	176	196
1	40	41	double flat	90	177	185	205
1	50	41	double flat	90	187	196	216
2	65	60	double flat	140	248	259	277
2	80	60	double flat	140	265	276	294


* Bonnet code 1E, 2E (handwheel extension) are necessary for valve bodies with flanges

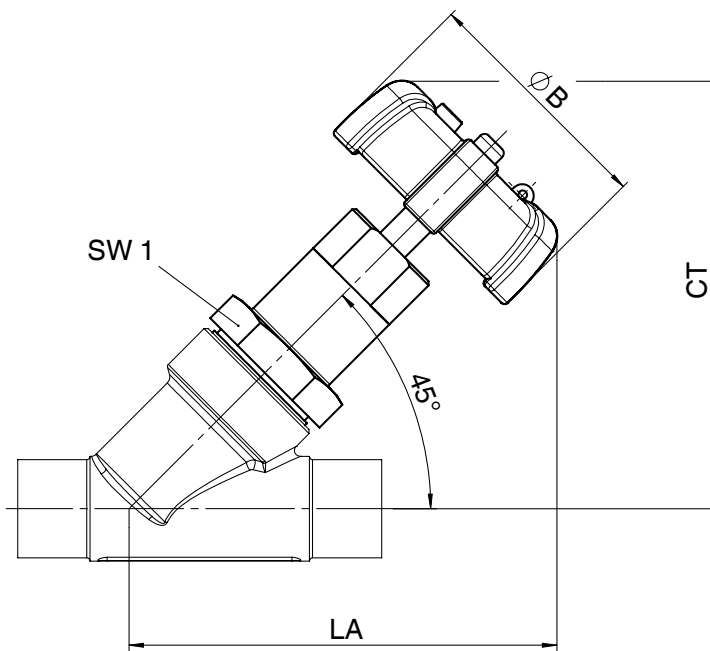

Dimensions [mm]

Installation dimensions - Valve with angle body

Bonnet	DN	SW1		øB	CT/LA (max. height)	
					Control function code 0	Control function code L
1	15	41	hexagonal	90	140	153
1	20	46	hexagonal	90	145	158
1	25	46	hexagonal	90	154	167
1	32	41	double flat	90	159	172
1	40	41	double flat	90	170	183
1	50	41	double flat	90	181	194

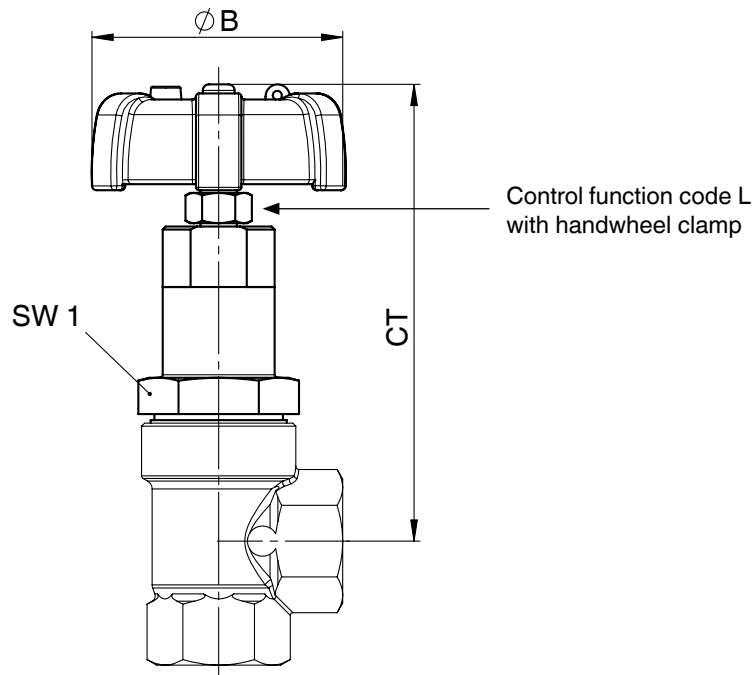

Dimensions [mm]

Butt weld spigots, connection code 0, 16, 17, 18, 37, 60 Valve body material: 1.4435 (code 34), 1.4408 (code 37)


		Connection code															
		Material code 34		Material code 37		0		16		17		18		37		60	
DN	L	LB	L	LB	ø d	s	ø d	s	ø d	s	ø d	s	ø d	s	ø d	s	
10	105	35.5	-	-	-	-	12	1.0	13	1.5	14	2.0	-	-	17.2	1.6	
15	105	35.5	100	33	18	1.5	18	1.0	19	1.5	20	2.0	-	-	21.3	1.6	
20	120	39.0	108	33	22	1.5	22	1.0	23	1.5	24	2.0	-	-	26.9	1.6	
25	125	38.5	112	32	28	1.5	28	1.0	29	1.5	30	2.0	25.0	1.2	33.7	2.0	
32	155	48.0	137	39	-	-	34	1.0	35	1.5	36	2.0	-	-	42.4	2.0	
40	160	47.0	146	40	40	1.5	40	1.0	41	1.5	42	2.0	38.0	1.2	48.3	2.0	
50	180	48.0	160	38	52	1.5	52	1.0	53	1.5	54	2.0	51.0	1.2	60.3	2.0	
65	-	-	290	96	-	-	-	-	70	2.0	-	-	63.5	1.6	76.1	2.0	
80	-	-	310	95	-	-	-	-	85	2.0	-	-	76.1	1.6	88.9	2.3	

For materials see overview on last page

Butt weld spigots, connection code 59, 63, 65 Valve body material: 1.4435 (code 34), 1.4408 (code 37)

		Connection code									
		Material code 34		Material code 37		59		63		65	
DN	L	LB	L	LB	ø d	s	ø d	s	ø d	s	
10	105	35.5	-	-	-	-	-	-	-	-	
15	105	35.5	100	33	12.70	1.65	21.3	2.11	21.3	2.77	
20	120	39.0	108	33	19.05	1.65	26.7	2.11	26.7	2.87	
25	125	38.5	112	32	25.40	1.65	33.4	2.75	33.4	3.88	
32	155	48.0	137	39	-	-	-	-	42.4	3.56	
40	160	47.0	146	40	38.10	1.65	48.3	2.77	48.3	3.68	
50	180	48.0	160	38	50.80	1.65	60.3	2.77	60.3	3.91	
65	-	-	290	96	63.50	1.65	73.0	3.05	-	-	
80	-	-	310	95	76.20	1.65	88.9	3.05	-	-	

For materials see overview on last page

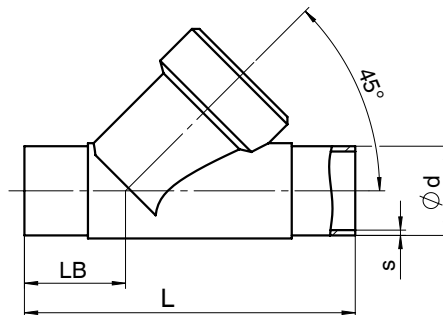

Dimensions [mm]

Butt weld spigots, connection code 0, 16, 17, 18, 59, 60 Valve body material: Forged body (code 40)


			Connection code											
			0		16		17		18		59		60	
DN	L	LB	ø d	s	ø d	s	ø d	s	ø d	s	ø d	s	ø d	s
6*	80	26.5	8	1.0	-	-	-	-	-	-	-	-	-	-
8*	80	26.5	10	1.0	-	-	-	-	-	-	-	-	13.5	1.6
10*	80	26.5	-	-	12	1.0	13	1.5	14	2.0	9.53	0.89	-	-
15*	80	26.5	-	-	-	-	-	-	-	-	12.70	1.65	-	-

* only with actuator size 0

Butt weld spigots, connection code 17, 59, 60 Valve body material: 1.4435 (code C2)

			Connection code					
			17		60		59	
DN	L	LB	ø d	s	ø d	s	ø d	s
8	105*	35.5*	-	-	13.5	1.6	-	-
10	105	35.5	13	1.5	17.2	1.6	-	-
15	105	35.5	19	1.5	21.3	1.6	12.70	1.65
20	120	39.0	23	1.5	26.9	1.6	19.05	1.65
25	125	39.5	29	1.5	33.7	2.0	25.40	1.65
32	155	48.0	35	1.5	42.4	2.0	-	-
40	160	47.0	41	1.5	48.3	2.0	38.10	1.65
50	180	48.0	53	1.5	60.3	2.0	50.80	1.65
65	290	96.0	70	2.0	76.1	2.0	63.50	1.65
80	310	95.0	85	2.0	88.9	2.3	76.20	1.65

* Connection code 1A: L = 100, LB = 33,5

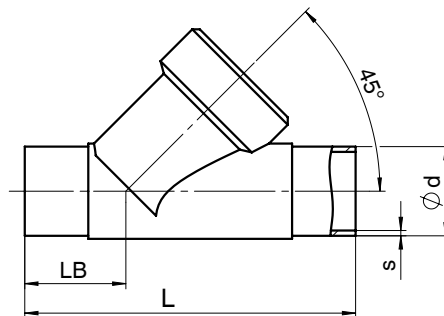

Body dimensions [mm]

Threaded sockets DIN, connection code 1 Valve body material: 1.4408 (code 37)


DN	L	LB	R	t	SW2	
8*	65	19.0	G 1/4	12.0	17	hexagonal
10*	65	19.0	G 3/8	12.0	24	hexagonal
15*	65	19.0	G 1/2	11.4	24	hexagonal
10	65	16.5	G 3/8	11.4	27	hexagonal
15	65	16.5	G 1/2	15.0	27	hexagonal
20	75	17.5	G 3/4	16.3	32	hexagonal
25	90	24.0	G 1	19.1	41	hexagonal
32	110	33.0	G 1 1/4	21.4	50	octagonal
40	120	30.0	G 1 1/2	21.4	55	octagonal
50	150	40.0	G 2	25.7	70	octagonal
65	190	46.0	G 2 1/2	30.2	85	octagonal
80	220	50.0	G 3	33.3	100	octagonal

* only with bonnet size 0

Threaded sockets NPT, BS 21 Rc, connection code 3C, 3D Valve body material: 1.4408 (code 37)

					Connection code			
					3C		3D	
DN	L	LB	SW2		R	t	R	t
8*	65	19.0	17	hexagonal	-	-	1/4" NPT	10.1
10*	65	27.0	24	hexagonal	-	-	3/8" NPT	10.4
15*	65	27.0	24	hexagonal	-	-	1/2" NPT	13.6
15	65	16.5	27	hexagonal	Rc 1/2	15.0	1/2" NPT	13.6
20	75	17.5	32	hexagonal	Rc 3/4	16.3	3/4" NPT	14.1
25	90	24.0	41	hexagonal	Rc 1	19.1	1" NPT	17.0
32	110	33.0	50	octagonal	Rc 1 1/4	21.4	1 1/4" NPT	17.5
40	120	30.0	55	octagonal	Rc 1 1/2	21.4	1 1/2" NPT	17.3
50	150	40.0	70	octagonal	Rc 2	25.7	2" NPT	17.8
65	190	46.0	85	octagonal	Rc 2 1/2	30.2	2 1/2" NPT	23.7
80	220	50.0	100	octagonal	Rc 3	33.3	3" NPT	25.8


* only with bonnet size 0

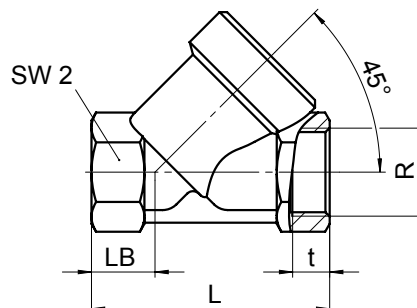

Body dimensions [mm]

Threaded sockets DIN, connection code 1, 3D / Angle body Valve body material: 1.4408 (code 37)

DN	SW2	LE	H2	Connection code 1		Connection code 3D	
				R	t	R	t
15	27	30	30.0	G 1/2	15.0	1/2" NPT	13.6
20	32	35	37.5	G 3/4	16.3	3/4" NPT	14.1
25	41	41	41.0	G 1	19.1	1" NPT	17.0
32	50	50	48.0	G 1 1/4	21.4	1 1/4" NPT	17.5
40	55	50	55.0	G 1 1/2	21.4	1 1/2" NPT	17.3
50	70	60	62.0	G 2	25.7	2" NPT	17.8




Threaded spigots, connection code 9 Valve body material: 1.4408 (code 37), Forged body (code 40)

DN	L	LB	t	R
6*	65	19	12	G 1/4
8*	65	19	12	G 3/8
10*	65	19	12	G 1/2
15*	65	19	12	G 3/4
15	90	25	12	G 3/4
20	110	30	15	G 1
25	118	30	15	G 1 1/4
32	130	38	13	G 1 1/2
40	140	35	13	G 1 3/4
50	175	50	15	G 2 3/8
65	216	52	15	G 3
80	254	64	18	G 3 1/2

* only with bonnet size 0


For materials see overview on page 13

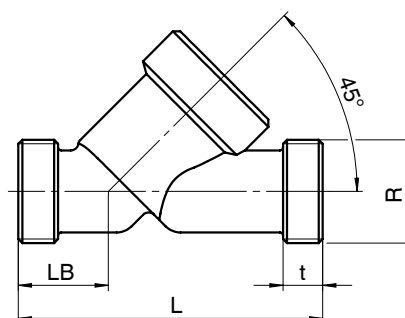

Body dimensions [mm]


Flanges, connection code 10 Valve body material: 1.4408 (code 37)

DN	FTF	LB	$\varnothing D$	$\varnothing L$	$\varnothing k$	Number of bolts
15	130	33	95	14	65	4
20	150	45	105	14	75	4
25	160	44	115	14	85	4
32	180	51	140	18	100	4
40	200	52	150	18	110	4
50	230	50	165	18	125	4

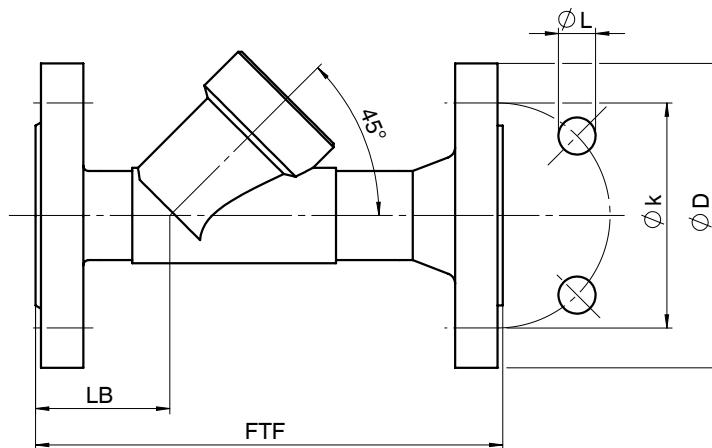

Flanges, connection code 13, 47 Valve body material: 1.4435 (code 34)


DN	FTF	LB	Connection code 13				Connection code 47			
			$\varnothing D$	$\varnothing L$	$\varnothing k$	Number of bolts	$\varnothing D$	$\varnothing L$	$\varnothing k$	Number of bolts
15	210	72	95	14	65	4	89.0	15.7	60.5	4
20	280	78	105	14	75	4	98.6	15.7	69.8	4
25	280	77	115	14	85	4	108.0	15.7	79.2	4
32	310	89	140	18	100	4	117.3	15.7	88.9	4
40	320	91	150	18	110	4	127.0	15.7	98.6	4
50	330	95	165	18	125	4	152.4	19.1	120.7	4

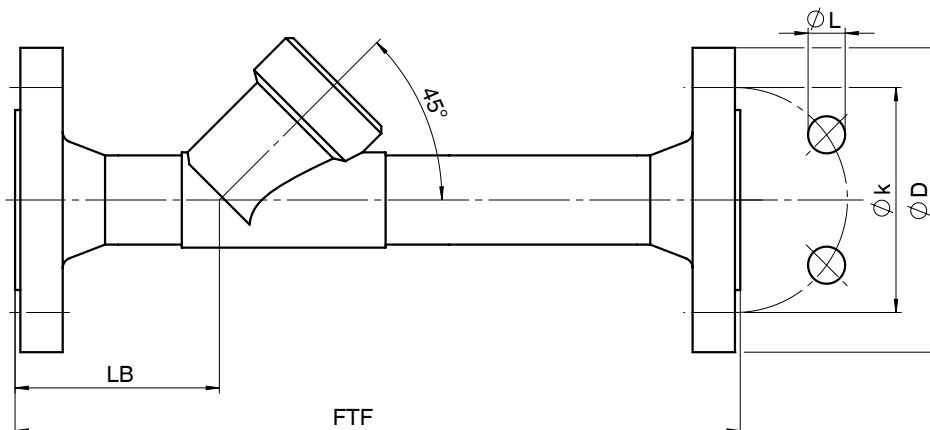

Body dimensions [mm]

Clamp connections, connection code 80, 82, 86, 88
Valve body material: 1.4435 (code 34)

DN	NPS	Connection code								Connection code			
		LB	L	82		86		88		80			
				ø d1	ø d3	ø d1	ø d3	ø d1	ø d3	LB	L	ø d1	ø d3
15	1/2"	47.5	130	18.1	50.5	16	34.0	9.40	25.0	33.5	101.6	9.40	25.0
20	3/4"	54.0	150	23.7	50.5	20	34.0	15.75	25.0	30.0	101.6	15.75	25.0
25	1"	56.0	160	29.7	50.5	26	50.5	22.10	50.5	33.0	114.3	22.10	50.5
32	1 1/4"	62.0	180	38.4	64.0	32	50.5	-	-	-	-	-	-
40	1 1/2"	67.0	200	44.3	64.0	38	50.5	34.80	50.5	37.0	139.7	34.80	50.5
50	2"	73.0	230	56.3	77.5	50	64.0	47.50	64.0	36.5	158.8	47.50	64.0

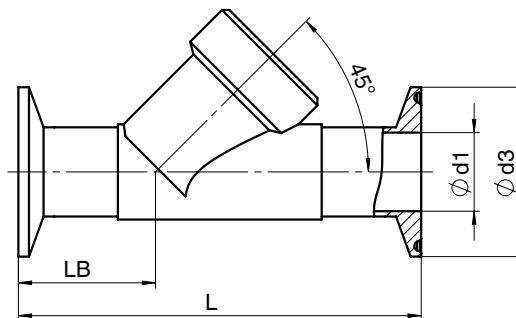

Overview of metal bodies for GEMÜ 507

Connection code	Spigots																					
	0		16		17				18		37		59				60				63	65
Material code	34	40	34	40	34	37	40	C2	34	40	34	37	34	37	40	C2	34	37	40	C2	37	34
DN 6	-	X*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DN 8	-	X*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	X*	-	-	-
DN 10	-	-	-	X*	-	-	X*	-	-	X*	-	-	-	-	X*	-	-	-	-	-	-	-
DN 15	-	-	-	-	-	-	-	-	-	-	-	-	-	-	X*	-	-	-	-	-	-	-
DN 8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	X	-
DN 10	-	-	X	-	X	-	-	X	-	-	-	-	-	-	-	-	X	-	-	X	-	-
DN 15	X	-	X	-	X	X	-	X	X	-	-	-	X	-	-	X	X	X	-	X	X	X
DN 20	X	-	X	-	X	X	-	X	X	-	-	-	X	-	-	X	X	X	-	X	X	X
DN 25	X	-	X	-	X	X	-	X	X	-	X	-	X	-	-	X	X	X	-	X	X	X
DN 32	-	-	X	-	X	X	-	X	X	-	-	-	-	-	-	-	X	X	-	X	-	X
DN 40	X	-	X	-	X	X	-	X	X	-	X	-	X	-	-	X	X	X	-	X	X	X
DN 50	X	-	X	-	X	X	-	X	X	-	X	-	X	-	-	X	X	X	-	X	X	X
DN 65	-	-	-	-	-	X	-	X	-	-	-	X	-	X	-	X	-	X	-	X	X	-
DN 80	-	-	-	-	-	X	-	X	-	-	-	X	-	X	-	X	-	X	-	X	X	-

* only with bonnet size 0

Overview of metal bodies for GEMÜ 507

Connection code	Threaded connections						Clamps				Flanges			
	1		3C	9		3D		80	82	86	88	10**	13	47
Material code	37	37	37	37	40	37	37	34	34	34	34	37	34	34
Body configuration	2/2-way body	Angle body				2/2-way body	Angle body							
DN 6	-	-	-	-	X*	-	-	-	-	-	-	-	-	-
DN 8	X*	-	-	X*	-	X*	-	-	-	-	-	-	-	-
DN 10	X*	-	-	X*	-	X*	-	-	-	-	-	-	-	-
DN 15	X*	-	-	X*	-	X*	-	-	-	-	-	-	-	-
DN 10	X	-	-	-	-	-	-	-	-	-	-	-	-	-
DN 15	X	X	X	X	-	X	X	X	X	X	X	X	X	X
DN 20	X	X	X	X	-	X	X	X	X	X	X	X	X	X
DN 25	X	X	X	X	-	X	X	X	X	X	X	X	X	X
DN 32	X	X	X	X	-	X	X	-	X	X	-	X	X	X
DN 40	X	X	X	X	-	X	X	X	X	X	X	X	X	X
DN 50	X	X	X	X	-	X	X	X	X	X	X	X	X	X
DN 65	X	-	X	X	-	X	-	-	-	-	-	-	-	-
DN 80	X	-	X	X	-	X	-	-	-	-	-	-	-	-

* only with bonnet size 0

** only with bonnet size 1E or 2E

For further globe valves, accessories and other products, please see our Product Range catalogue and Price List.
Contact GEMÜ.

GEMÜ® VALVES, MEASUREMENT AND CONTROL SYSTEMS

